


MARKEM 9880 CONTACT CODER

Reliability and simplicity for your packaging line.

MARKEM contact coders offer simple, reliable operation and use Touch Dry® inks for clean, efficient coding. The electronic 9880 is designed for use on intermittent packaging lines.

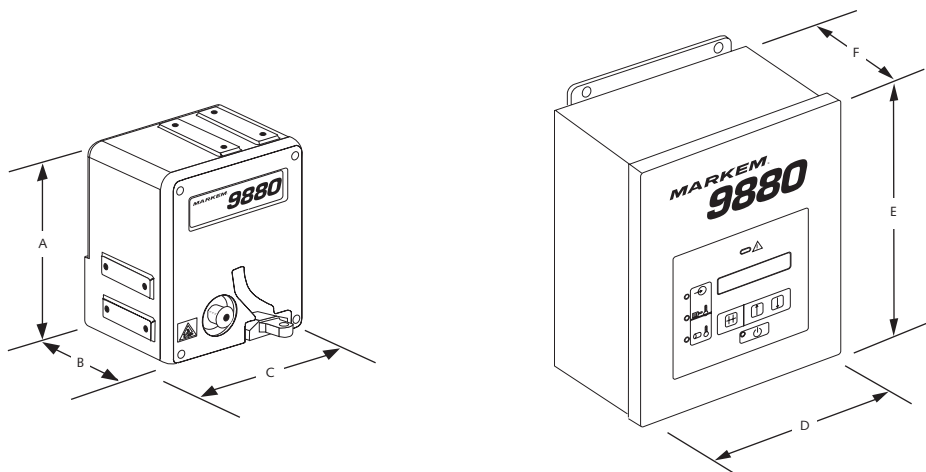

	A	B	C	D	E	F
CM	20,0	3,6	17,0	21,6	27,3	12,7
INCHES	7.6	5.4	6.7	8.5	10.8	5.0

Print Area: 3,81cm (1½") axial by 3,02cm (1¾") radial.

Cycle Rate: Up to 140 cycles/minute.

Electrical and Environmental: 115/230V, 50–60Hz, 1ph, 200W.
100/200V, 50–60Hz, 1ph, 200W.
Noise level not to exceed 70dB(A).

Sensors: Proximity switch, electric eye, dry contact closure, or PLC interface.
Drive — DC stepping motor and solid-state controls.

Supplies: Flat engraved brass Touch Dry type.
Touch Dry ink rolls available in three widths and a variety of colors.

Mounting: Printhead and work table — on quick-mount bracket.
Control box — free-standing.

Weight (approx): Printhead — 7,7kg (17lbs. 4.5oz).
Control box — 7,9kg (17lbs. 12oz).

Patents: United States 4,444,108; 5,503,070;
5,515,780; Canada 1,208,970.
Other patents pending.

Specifications and other technical information are subject to change without notice.

MARKEM

w w w . m a r k e m . c o m

**AUTHORIZED
MARKEM
DISTRIBUTOR:**



OZED LIMITED
10 Adelabu Close,
Opposite Customs College,
Ikeja, Lagos-State,
NIGERIA.

Tel: (01) 497-3946 / 496-1642 Fax: +234-1-496-1642
Email: ozedtechnical@metrong.com

MARKEM Continental Europe b.v., Nesland 3, Postbus 178, 1380 AD, Weesp, The Netherlands
• Tel. +31 294 460460 • Fax +31 294 460466 • www.markem.nl • **MARKEM HEADQUARTERS:**
150 Congress Street, PO Box 2100 • Keene, NH 03431 USA • Tel. +1 603-352-1130 • Fax +1 603-357-1835
www.markem.com • **MARKEM BUSINESS CENTERS:** Belgium, Brazil, Canada, China, France, Germany,
Italy, Japan, Malaysia, Mexico, Netherlands, Philippines, Singapore, Spain, Switzerland, United Kingdom
©MARKEM Corporation 1871761 Rev. 00 • Printed in the Netherlands (11/05)